

DIRECTIONS

STEP 1: With the dog standing, lay the harness on the ground next to the dog.

STEP 2: Unfasten the collar buckle "A" (see illustration 1) and place the collar strap around the dog's neck and refasten buckle "A" (see illustration 2).

STEP 3: Adjust the collar strap to fit just below the collar area on the dog's neck (see illustration 2).

STEP 4: Leave Buckle "B" fastened. Turn the collar so buckle "B" is on top of the dog's shoulders (see illustration 2).

NOTE: When putting the harness on the dog, try to prevent the straps from becoming twisted. This will help avoid confusion.

STEP 5: Place the chest strap between the dog's front legs (see illustration 2).

STEP 6: Unfasten hip buckle "C". Place the hip strap over the dog's back and refasten buckle "C" (see illustration 2). Adjust the hip strap so it pulls the chest strap up and against the dog. The hip strap should be over the dog's loin area (see illustration 3).

STEP 7: Adjust the strap stay on the hip strap, so the back strap is centered along the top of the dog's back (see illustration 3).

STEP 8: Place the dog's legs through the leg loops one at a time. If needed, the loops can be unthreaded at the slide to get them on the dog's legs (see illustration 3).

STEP 9: Slide the leg loops up and above the dog's hock (knee). Adjust the leg loops so they fit snug around the dog's legs. The harness will not work properly if the leg loops are too loose and fall below the dog's hock (see illustration 3).

NOTE: When adjusted properly, the harness should look similar to illustration 3. The chest strap should stay close to the dog's body and pull slightly on the leg loops.

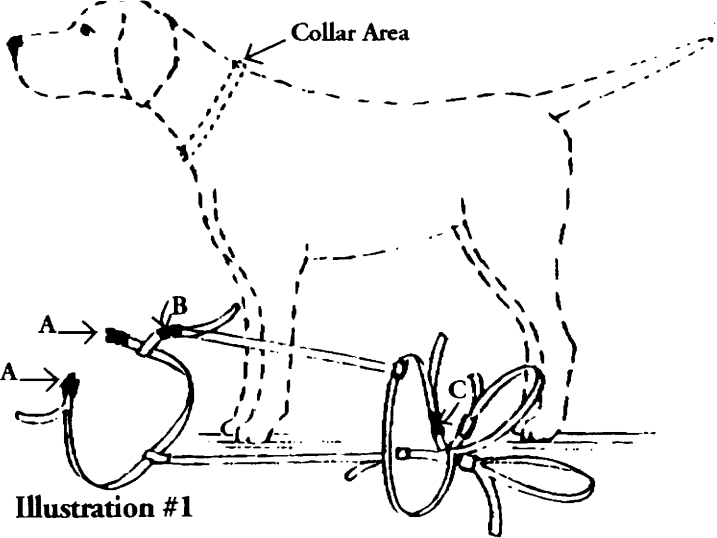


Illustration #1

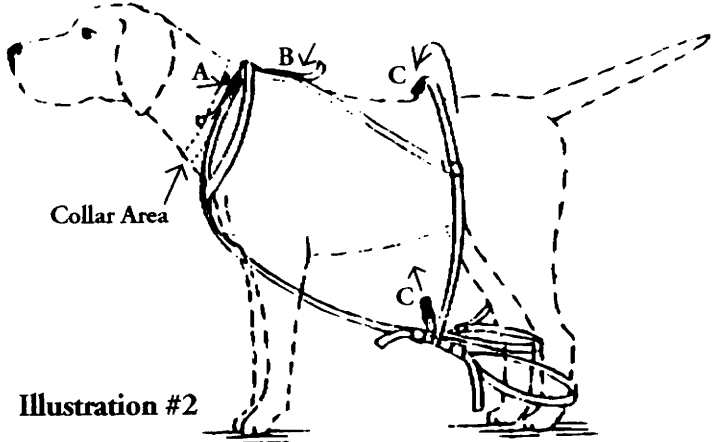


Illustration #2


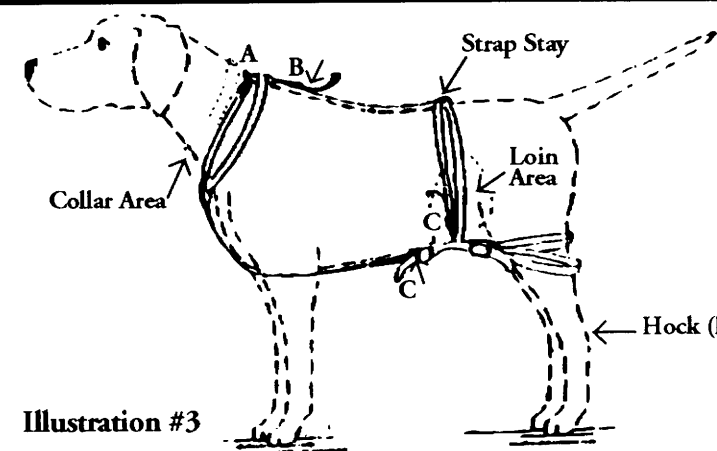



Illustration #3

NON-RUSTING QUICK RELEASE BUCKLES... SAFE, SECURE, EASY-TO-USE!!!

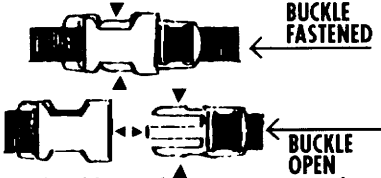

To open buckle, push in at arrows and pull apart.


THREADING THE STRAP THROUGH THE BUCKLE OR SLIDE



With grooves on center bar facing you, thread the strap up through middle opening #1, then down through opening #2.

TRIMMING EXCESS STRAP

After the harness has been adjusted, excess strap ends can be trimmed away. Once trimmed, the harness will NOT adjust to larger sizes.

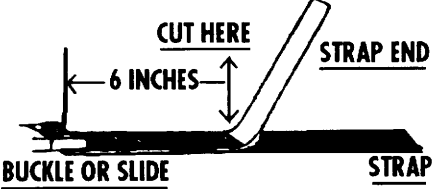

HOW TO TRIM: Measure at least six inches of strap end from the end of the buckle or slide and cut off the excess. Heat the end with a match to seal it and prevent raveling.

WARNING: Do NOT leave dog unattended with harness on.

WARNING: This harness is NOT chewproof. To prevent chewing, apply an anti-chew spray (available through most pet supply stores).